

Enfiniti 100

Polyurea with Polyaspartic Floor Coating



SYSTEM DATA SHEET



The UCoat It Enfiniti 100 floor coating system is a high-performance, polyurea basecoat and Polyaspartic top coat designed to provide superior durability, chemical resistance, and aesthetic appeal. This two coat system can be applied in one day allowing for a fast turnaround. Ideal for a variety of commercial, industrial, and residential applications where a high-gloss, and long-lasting surface is required.


CHARACTERISTICS / ADVANTAGES

- Medium cure industrial grade coating
- High-Gloss, UV Resistant Topcoat
- Fast Return To Service – In 24 Hours!
- Hides Dirt & Surface Imperfections

USES

- Garage floors
- Basement floors
- Any floors where quick return-to-service is needed

SYSTEM STRUCTURE

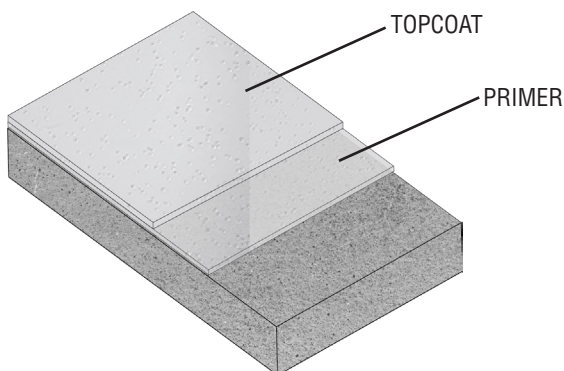

| DESCRIPTION | PRODUCT | MIL THICKNESS |
|-------------|-------------------------|---------------|
| PRIMER | UPrime-MCP | 8-16 |
| TOP COAT | UGlaze-84 | 5-12 |
| OPTIONS | UFlek Decorative Flakes | |

Material: Polyurea base coat with Polyaspartic top coat

Number of coats: 2

Finish: High Gloss

Mil Thickness: 13-28 mils thick (dry)

Colors: See Enfiniti Color Chart

Application Instructions

SURFACE PREPARATION:

- The substrate must be clean, dry, sound and homogeneous, free from oils, grease, dust and loose or friable particles. Paint, cement laitance and other poorly adhering contaminants must be removed.
- Two types of surface preparation can be completed over concrete. We recommend a dry preparation which can be completed using a surface grinder, creating a fine profile. All grinding should be vacuumed ensuring the surface is dust free. You may also acid wash the surface with a muriatic acid or prep solution, rinse thoroughly and let dry. To test dryness prior to application, place a 4'X4' plastic sheet on the substrate and tap down the edges. If after 24 hours, the substrate is still dry below the plastic sheet you can proceed with application.

APPLICATION:

No primer is required. Please refer to the Product Data Sheets for specific mixing and application instruction.

NOTICE TO BUYER: Disclaimer of warranties and limitations of liability

This warranty applies only to the Do-it-yourself customer of UCI NA LLC. and the UCoat floor coating products. If a UCoat It floor coating should ever peel up, blister or lift from a properly prepared (previously untreated and uncoated) concrete floor surface during the lifetime of the original purchaser so long as the original purchaser continues to maintain ownership of the said coated floor and can provide an original proof of purchase; UCI NA LLC. and its agents and representatives entire liability for the warranty shall be limited and in no event shall extend beyond that which has been stated herein and granted to the do-it-yourself customer. Said liability shall not extend to indirect, specific, incidental or consequential damages as they may relate to handling, storage, use, misuse or improper application of UCoat It products. Do-it-yourself is defined as a customer of UCI NA LLC. who purchases a UCoat It product directly from UCI NA LLC. or one of its authorized agents or representatives and applies/installs said product(s) himself/herself without modification or deviation from prescribed procedures written by UCI NA LLC. and included with the purchased product(s) in his/her owned structure.

Limited warranty applies only to coated areas which are part of a dwelling or structure which is owned by the do-it-yourself customer. Properly prepared floor is defined as a previously untreated/uncoated concrete floor in good condition where all preparation steps as defined by UCI NA LLC. in written instructions have been successfully performed prior to application of a UCoat It product. This limited warranty shall only apply to peeling, blistering or lifting that occurs to properly prepared floors as defined above.

Precautions and Limitation of Warranty

We warrant that our product is manufactured to the specifications as stated here or in other publications. All other information supplied by us is accurate to the best of our knowledge. Such information supplied about our products is not a representation or a warranty. It is supplied on the condition that you shall make your own tests to determine the suitability of our product for your particular purpose. No warranty is made, expressed or implied, regarding such other information, the data on which it is based, or the results you will obtain from its use. No warranty is made, expressed or implied, that our product shall be merchantable or that our product shall be fit for any particular purpose. No warranty is made that the use of such information or our product will not infringe upon any patent. We shall have no liability for incidental or consequential damages, direct or indirect. Our liability is limited to the net selling price of our product or the replacement of our product, at our option. Acceptance of delivery of our product means that you have accepted the terms of the warranty whether or not purchase orders or other documents state terms that vary from this warranty. No representative is authorized to make any representation or warranty or assume any other liability on our behalf with any sale of our products. Uncured epoxy resins, polymers and their curing agents may be alkaline, toxic or both, depending on the system. They may cause allergic reactions or hypersensitivity reactions. Before using any material, read the Safety Data Sheet and follow all precautions to prevent bodily harm.